

Technical Data Sheet

BETA TAPE

#BT2105


General Information

Beta tape has been developed by the technology of the Acrylic Foam Tape which had been used on car interior and exterior parts attachment for more than ten years. #BT2105 is a single face acrylic sealing tapes which have much superior initial adhesion, heat resistance and durability compared to a conventional butyl sealing tape.

Features

- Can be applied to many substrates used for automotive parts without special surface treatment.
- Shows a high initial adhesion and can be applied to a complicated 3-dimensional surface.
- Provides a superior sealing performance to rough surfaces because of enough flexibility and individual foam construction.
- Excels in extreme weather, heat and solvent resistance.
- Reduces the possibility of staining bonded surfaces.

Configuration

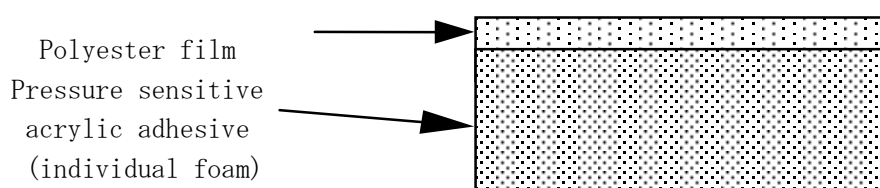

Tape No.	#BT2105
Color	Black
Thickness	0.5 mm


Usage

Sealing or bonding support usage for the weather-strip, several interior parts pad or sponge, etc.

Test results

<A> 180° Peeling strength (N/cm)

BT2105 V.S. #5076 Adhesion test on "X" head lining.

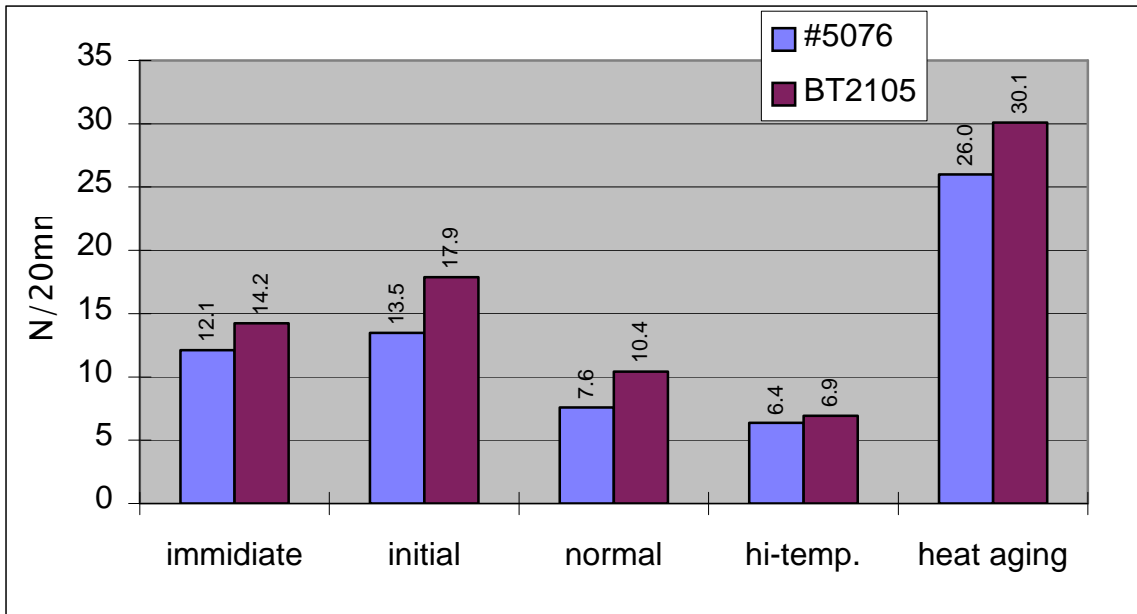

Test method: 180degree peel (Test speed 50mm/min)
Test sample: "X" Head lining.

Notices

- * The data cited in the tables is the actual test data, and not a guaranteed number.
Please test to see if it can work well for the application considered before using.
- * To keep the superior, please store the BETA TAPE under the room temperature and humidity conditions.